
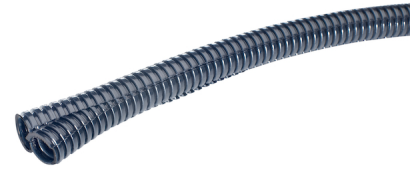


U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>SILVYN® SPLIT</b>	<b>12.09.2012</b>

Dimensionally stable  
Flexible  
Crush-resistant  
Subsequent cable protection after cable installation  
Fast and easy assembly



### Info

New sizes are available

### Application range

Vehicle construction  
Shipbuilding  
Mechanical engineering  
Electrical industry  
Used in areas where cables and wires need to be protected after assembly

### Design

Divisible corrugated polyamide 6 conduit

### Note

UV-resistant and weather-resistant  
On request  
SILVYN® SPLIT PP (polypropylene) SILVYN® SPLIT NW 54/70

### Product features

Halogen and cadmium-free  
Abrasion-resistant  
High resistance to oil, petrol, acids and other chemicals

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

### Technical Data


On request:	SILVYN® SPLIT PP (polypropylene) SILVYN® SPLIT NW 54/70
Colour delivered:	Black (RAL 9005), UV-resistant
Material:	Halogen-free PA
Protection rating:	IP 43 with SILVYN® SPLIT COV
Temperature range:	-40 °C to +120 °C short-term 150 °C


Product Management	Document: LAPP_PRO1185EN.pdf	1 / 3
--------------------	------------------------------	-------

**SILVYN® SPLIT**

12.09.2012

Part number	Article designation	Bending radius (mm)	Conduit size (mm)	For conduit with outer Ø (mm)	Suitable for SILVYN® COV	PU (m)
SILVYN® SPLIT						
61806621	8	70	6,2/11,2	11.2		50.0
61806620	10	55	8,9/13,6	13.6	M16/PG9	50.0
61806630	14	75	12,9/18,7	18.7	M20/PG13,5	50.0
61806631	16	100	10,3/15,8	15.8		50.0
61806640	20	105	19,8/25,9	25.9	M25/PG21	50.0
61806641	21	120	13,9/21	21.0		50.0
61806650	23	125	23,7/31,3	31.3	M32/PG29	50.0
61806651	32	180	26,2/34,5	34.5		50.0
61806660	37	170	31,7/41,9	41.9	M40/PG29	25.0
61806670	45	170	43,1/54,2	54.2	M50	25.0

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	 <b>LAPP GROUP</b>
	<b>SILVYN® SPLIT</b>	<b>12.09.2012</b>

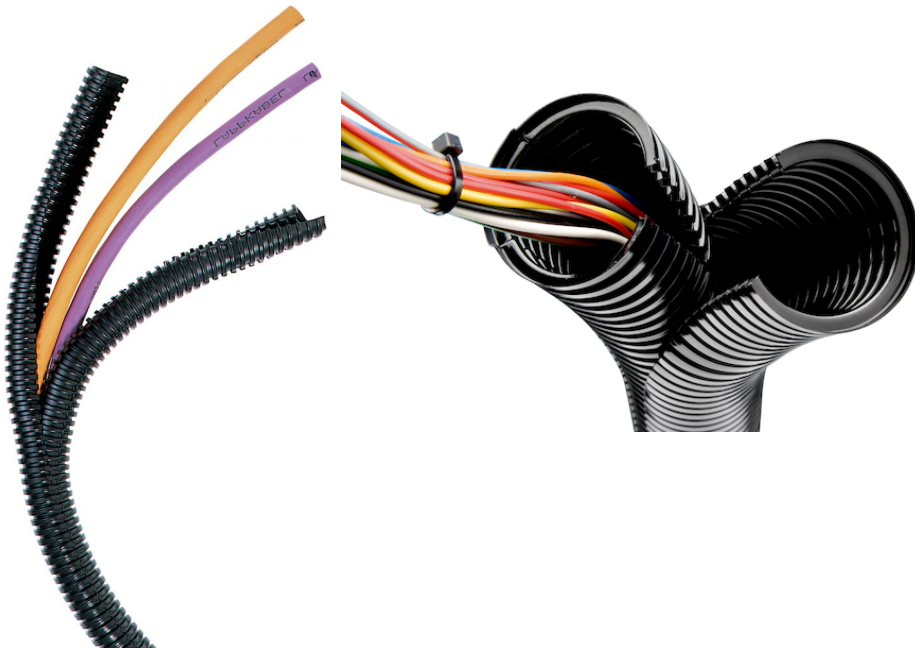

Product Management	Document: LAPP_PRO1185EN.pdf	3 / 3
--------------------	------------------------------	-------