

U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINDICHT® RWV-M	12.09.2012

Strain relief
 Sealed by incised sealing ring
 Corrosion-resistant
 Decrease in installation height
 Seawater-resistant



Application range

Angled glands are used in areas where cables have to run in parallel to the housing wall.
 Electric motor manufacturing
 Machine and equipment manufacturing
 Plant engineering
 Light and sound applications

Design

Metric connection thread acc. to EN 50262

Note

Counter nut to be used: SKINDICHT® SM-M

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Material:

Body: zinc die-casting, nickel-plated
 Compression screw and hexagon nut: nickel-plated brass
 Incised sealing ring: CR/NBR
 O-ring: NBR

Protection rating:

IP 55


Temperature range:


-20°C to +100°C

Product Management	Document: LAPP_PRO1020EN.pdf	1 / 3
--------------------	------------------------------	-------



Part number	Article designation / size	Clamping range ØF (mm)	L	SW1	Ø A1	SW2	Ø A2	Ø G	Height (mm)	Overall length/ C (mm)	Thread length/ D (mm)	SW3
SKINDICHT® RWV-M												
52107800	12 x 1,5	5	20.5	14	16	12	13.2	8	5	26,1	11.5	17
52107810	16 x 1,5	9 - 3	23.5	18	20	16	17.6	12	5	28,6	11.5	22
52107820	20 x 1,5	13 - 4	28.5	22	24	20	22.2	15	5	35,1	12.5	27
52107830	25 x 1,5	17,5 - 8,5	31.0	27	29	25	27.5	20	5	38,1	13.5	32
52107840	32 x 1,5	25 - 16	33.0	34	36	32	35.2	27	5	44,6	13.5	41
52107850	40 x 1,5	32 - 23	43.0	42	45	40	43.5	35	5	53,1	15.5	46

U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINDICHT® RWV-M	12.09.2012

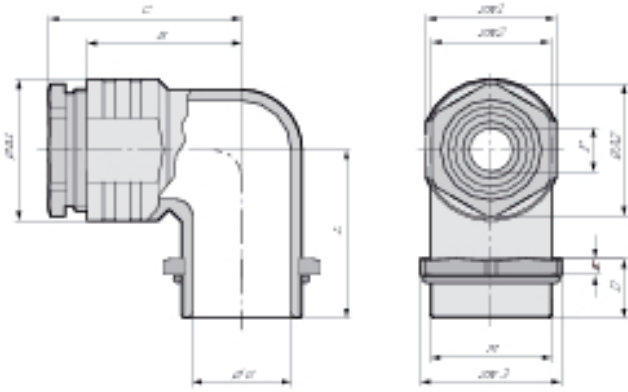

Product Management	Document: LAPP_PRO1020EN.pdf	3 / 3
--------------------	------------------------------	-------